

FISHER & PAYKEL

PRELIMINARY SPECIFICATION GUIDE

OVEN, 30"



OVERVIEW

Enhance your kitchen design with the 30" Oven. Refined styling means it matches seamlessly with our Contemporary kitchen appliances to create a coherent, considered look and feel. Intuitive controls and the performance to deliver perfect results make this oven beautiful to use.

MODELS

Oven, 30", 4.1 cu ft, 16 Function, Contemporary Style, Black, Dial Controls
OB30SDPTDB1

Oven, 30", 4.1 cu ft, 16 Function, Contemporary Style, Stainless Steel, Dial Controls
OB30SDPTDX1

Oven, 30", 4.1 cu ft, 16 Function, Contemporary Style, Black
OB30SDPTB1

Oven, 30", 4.1 cu ft, 16 Function, Contemporary Style, Stainless Steel
OB30SDPTX1

FEATURES

- ① Designed to fit flush with cabinetry
- ② Styled to perfectly match our Contemporary kitchen appliances
- ③ Generous 4.1 cu ft total capacity
- ④ High-resolution, user-friendly touch display
- ⑤ Guided cooking and recipes
- ⑥ Perfect results from a variety of oven functions
- ⑦ Even heat distribution throughout with AeroTech™ technology
- ⑧ Self-cleaning
- ⑨ CoolTouch door

ACCESSORIES

- ① Full extension sliding shelves
- ② Self-cleaning-proof side racks
- ③ Roasting dish, tray and rack
- ④ Food probe

FISHER & PAYKEL


PRELIMINARY SPECIFICATION GUIDE

OVEN, 30"

SPECIFICATIONS

Model No.	OB30SDPTDB1, OB30SDPTDX1, OB30SDPTB1, OB30SDPTX1
Dimensions	H 27 1/8" (689mm) x W 29 15/16" (760mm) x D 23 15/16" (608mm)
Total capacity	4.1 cu ft (115L)
Weight	242lb (110kg)
Electrical	
Supply	208-240VAC, 60Hz
Service	16.6-19.4-amp circuit


PRODUCT DIMENSIONS



ISO VIEW

		in	mm
(A)	Overall height	27 1/8	689
(B)	Overall width	29 15/16	760
(C)	Depth of chassis	22 3/8	569
(D)	Depth from front of chassis to front of oven door (excl. handle)	1 1/2	39
	Depth of oven door when fully open (measured from front of control panel)	20 7/8	530

CAVITY DIMENSIONS: STANDARD INSTALLATION

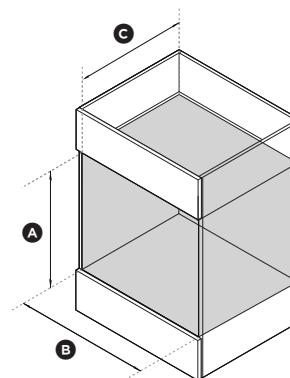

ISO VIEW

		in	mm
(A)	Minimum inside height of cavity	26 13/16	681
(B)	Minimum inside width of cavity	28 1/2	724
(C)	Minimum inside depth of cavity		
	• proud install	22 5/8	575
	• flush install	24 3/16	614