

FISHER & PAYKEL

PRELIMINARY SPECIFICATION GUIDE

OVEN, 24"



OVERVIEW

Elevate your kitchen design with the Oven, 24". Refined styling means it matches seamlessly with our Contemporary kitchen appliances to create a coherent, considered look and feel. Intuitive controls and the performance to deliver perfect results make this oven beautiful to use.

MODELS

Oven, 24", 3 cu ft, 15 Function, Contemporary Style, Black, Dial Controls
OB24SDPTDB1

Oven, 24", 3 cu ft, 15 Function, Contemporary Style, Stainless Steel, Dial Controls
OB24SDPTDX1

Oven, 24", 3 cu ft, 15 Function, Contemporary Style, Black
OB24SDPTB1

Oven, 24", 3 cu ft, 15 Function, Contemporary Style, Stainless Steel
OB24SDPTX1

FEATURES

- ① Designed to fit flush with cabinetry
- ② Styled to perfectly match our Contemporary kitchen appliances
- ③ Generous 3 cu ft total capacity
- ④ Soft open-and-close door
- ⑤ High-resolution, user-friendly touch display
- ⑥ Guided cooking and recipes
- ⑦ Perfect results from a variety of oven functions
- ⑧ Optimised moisture levels using ActiveVent technology
- ⑨ Even heat distribution throughout with AeroTech™ technology
- ⑩ Self-cleaning
- ⑪ CoolTouch door

ACCESSORIES

- ① Full extension sliding shelves
- ② Self-cleaning-proof side racks
- ③ Step-down and flat-wire shelves
- ④ Roasting dish, tray and rack
- ⑤ Food probe

FISHER & PAYKEL


PRELIMINARY SPECIFICATION GUIDE

OVEN, 24"

SPECIFICATIONS

Model No.	OB24SDPTDB1, OB24SDPTDX1, OB24SDPTB1, OB24SDPTX1
Dimensions	H 23 9/16" (598mm) x W 23 7/16" (596mm) x D 22 1/4" (565mm)
Total capacity	3 cu ft (85L)
Electrical	
Supply	208-240VAC, 60Hz
Service	16.6-19.4-amp circuit


PRODUCT DIMENSIONS



ISO VIEW

		in	mm
(A)	Overall height	23 9/16	598
(B)	Overall width	23 7/16	596
(C)	Depth of chassis	21 7/16	545
(D)	Depth from front of chassis to front of oven door (excl. handle)	13/16	20
	Depth of oven door when fully open (measured from front of control panel)	18 1/8	460

CAVITY DIMENSIONS: STANDARD INSTALLATION

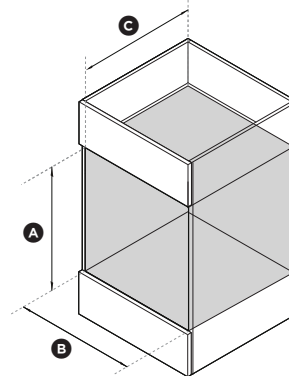

ISO VIEW

		in	mm
(A)	Minimum inside height of cavity	22 13/16	580
(B)	Minimum inside width of cavity	21 1/16	560
(C)	Minimum inside depth of cavity	21 5/8	550