

FISHER & PAYKEL

PRELIMINARY SPECIFICATION GUIDE

COMBINATION STEAM OVEN



OVERVIEW

The flagship appliance within our range, our Combination Steam Oven is designed to fit seamlessly into any kitchen. An intricate balance of full steam and steam assist functionality at a range of temperatures, to ensure perfect results. Accurate and gentle enough to respect even the most delicate ingredients, this oven masters the art of steam cooking. Beautiful to use, the touchscreen interface provides simple and intuitive guided cooking.

SERIES 11 MODELS

Combination Steam Oven, 24",

Minimal Style

Black, Touchscreen, Dial

OS24SDTDB1

Combination Steam Oven, 24",

Minimal Style

Black, Touchscreen

OS24SDTB1

Combination Steam Oven, 24", Contemporary Style

Black with Stainless Steel, Touchscreen, Dial

OS24SDTDX1

Combination Steam Oven, 24", Contemporary Style

Black with Stainless Steel, Touchscreen

OS24SDTX1

FEATURES

- ① Styled to perfectly match our Contemporary and Minimal kitchen appliances
- ② Perfect results from solo steam, convection heat, broil, or a combination of steam and convection heat functions
- ③ True temperature precision with three levels of steam with convection to seal natural flavors
- ④ Moisture control and even heat distribution thanks to ActiveVent and AeroTech™ technology
- ⑤ High-resolution, easy-to-use touchscreen with guided cooking and recipes
- ⑥ Quality materials and detailing to support a cohesive, considered kitchen design
- ⑦ Generous capacity with six shelf positions
- ⑧ Easy-access and refillable 50 fl oz water tank
- ⑨ CoolTouch door
- ⑩ Soft open-and-close door

ACCESSORIES

- ① Full-extension telescopic sliding shelves
- ② Broil pan, tray and rack
- ③ Perforated steam pan and tray
- ④ Step-down and flat wire shelves
- ⑤ Calibrated food probe for monitoring cooking in real time

FISHER & PAYKEL


PRELIMINARY SPECIFICATION GUIDE

COMBINATION STEAM OVEN

PRODUCT SPECIFICATIONS

Model No.	OS24SDTDB1, OS24SDTB1, OS24SDTX1, OS24SDTX1
Dimensions	H 23 9/16 (598mm) W 23 7/16 (596mm) D 22 1/4 (565mm)
Capacity	Total 3 cu ft, usable 2.5 cu ft
Weight	105.8lb (48kg)
Electrical	
Supply	208/240V
Service	16.6/9.4A
Connection	Hard wired

PRODUCT DIMENSIONS




ISO VIEW

	in	mm
(A) Overall height	23 9/16	598
(B) Overall width	23 7/16	596
(C) Depth of chassis	21 7/16	545
(D) Depth of oven front and control panel*	13/16	20

*Excluding handle.

CABINERY DIMENSIONS: STANDARD INSTALLATION

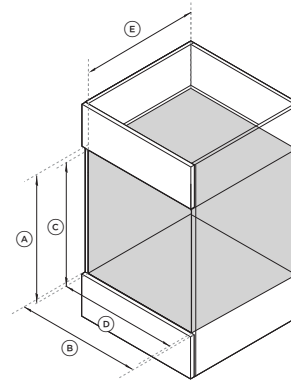

ISO VIEW

	in	mm
(A) Overall height	23 5/8	600
(B) Overall width	23 5/8	600
(C) Minimum inside height of cavity	22 13/16	580
(D) Minimum inside width of cavity	22 1/16	560
(E) Minimum inside depth of cavity	21 5/8	550